



AF



AR



CS



CR



CS JANUS PRO




CM




CW


ADAPTERS

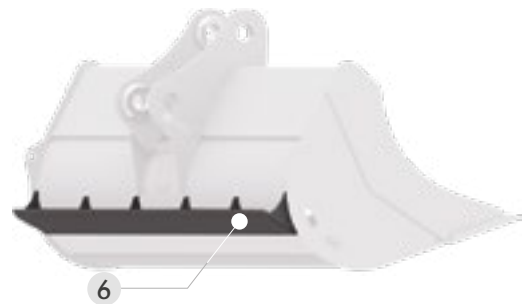

6

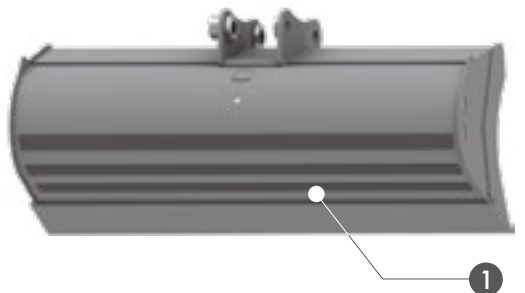

1

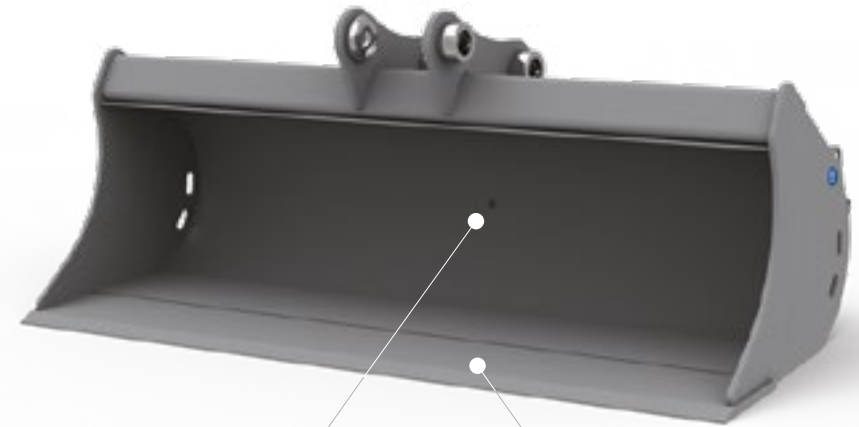

5

2

3



4

STANDARD TECHNICAL FEATURES

1 REINFORCING STRIPS

THE HORIZONTAL REINFORCING STRIPS ON THE BUCKET'S REAR AND BOTTOM PROTECT THE BUCKET FROM WEAR AND INCREASE ITS RESISTANCE.

OPTIONAL

2 PERFORATED BLADE

3 HB400 ADDITIONAL BOLT-ON REVERSIBLE CUTTING EDGE

BOLTED-IN HB400 REVERSIBLE UNDERBLADE. RECOMMENDED TO WORK ON PARTICULARLY ABRASIVE SOILS.

4 HB500 WELDED ADDITIONAL EDGE

5 BEZEL

IT ENSURES A HIGHER STRUCTURAL RESISTANCE. **HIGHLY RECOMMENDED WITH BUCKETS 1400MM WIDE OR MORE.**

6 REAR RAZOR

WHEN THE MACHINE'S ARM IS KEPT CLOSED, IT ALLOWS TO FINISH SURFACES EVENLY.

ITS ENLARGED AND LOW-PROFILE SHAPE MAKES IT SUITABLE FOR THE REALIZATION AND MAINTENANCE OF DRAINS, DITCHES AND EARTH BANKS. SUPPLIED WITH HOLES ON WALLS AND BOTTOM FOR THE WATER DRAINAGE.

THE INSTALLATION OF BEZELS IS HIGHLY RECOMMENDED FOR BUCKETS WIDER THAN 1400 MM, IN ORDER TO AVOID DAMAGES TO THE BUCKET IN CASE OF HEAVY DUTY JOBS OR WITH PARTICULARLY HARD TERRAINS:

- **WIDTH FROM 1400 TO 1500 MM: NR. 1 BEZEL**
- **WIDTH FROM 1600 TO 1600 MM: NR. 2 BEZELS**
- **WIDTH FROM 1800 TO 2200 MM: NR. 3 BEZELS**

MOD.	SP30	SP35	SP40	SP40	SP45	SP50	SP55	MIDI		EXCAVATOR	
								SP60	SP65 GD	SP70 GD	
TONS (LB)	1,0 - 1,8 (2204 - 3968)	1,8 - 2,5 (3968 - 5512)	2,0 - 2,5 (4409 - 5512)	2,5 - 4,0 (5512 - 8818)	4,0 - 5,0 (8818 - 11023)	5,0 - 7,5 (11023 - 16535)	7,5 - 10,0 (16535 - 22046)	10,0 - 12,0 (22046 - 26455)	12,0 - 18,0 (26456 - 39683)	18,0 - 22,0 (39683 - 48502)	

SP30 MACHINE WEIGHT 1,0 - 1,8 t (2204 - 3968 lb)

ADAPTERS

AR15

KG 7 (LB 15)

CS10

KG 10 (LB 22)

CS10 JANUS PRO

KG 10 (LB 22)

CR15

KG 10 (LB 22)

CM20


KG 10 (LB 22)

CW00

KG 5 (LB 11)

CW05

KG 9 (LB 19)

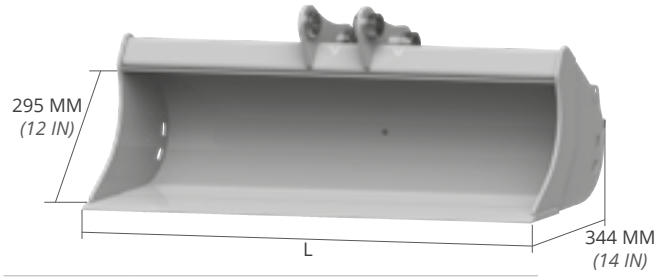

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
600 (24)	28 (62)	41 (10,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
800 (31)	37 (82)	58 (15,3)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1000 (39)	46 (101)	74 (19,5)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 6
- REAR RAZOR

SP35 MACHINE WEIGHT - 1,8 - 2,5 t (3968 - 5511 lb)

ADAPTERS

AR15

KG 7 (LB 15)

CS10

KG 10 (LB 22)

CS10 JANUS PRO

KG 10 (LB 22)

CR15


KG 10 (LB 22)

CM20

KG 10 (LB 22)

CW05

KG 9 (LB 19)

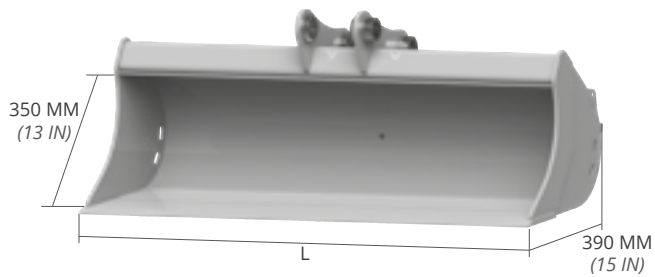

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
800 (31)	44 (97)	75 (19,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1000 (39)	53 (117)	96 (25,4)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1200 (47)	62 (137)	117 (30,9)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 2
- PERFORATED BLADE
- 3
- HB400ADDITIONAL
EDGE MOUNTED ON THE
BUCKET
- 4
- HB500WELDED
ADDITIONAL EDGE
- 6
- REAR RAZOR

SP40 MACHINE WEIGHT 2,0 - 2,5 t (4409 - 5512 lb)

ADAPTERS

AR30

KG 10 (LB 22)

CS10

KG 10 (LB 22)

CS30

KG 18 (LB 39)

CS10 JANUS PRO

KG 10 (LB 22)

CS30 JANUS PRO

KG 19 (LB 41)

CR30


KG 13 (LB 28)

CM30

KG 12 (LB 26)

CW05

KG 9 (LB 19)

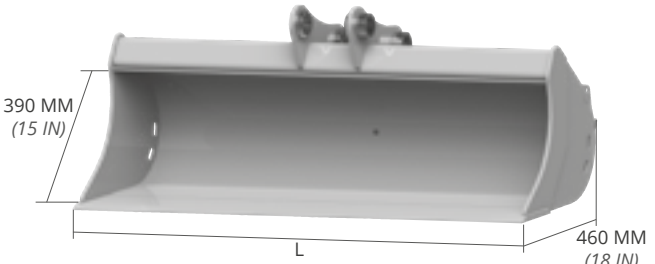

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	72 (159)	125 (33,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1200 (47)	85 (187)	154 (40,7)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

- 2
- PERFORATED
BLADE
- 3
- HB400ADDITIONAL
EDGE MOUNTED ON
THEBUCKET
- 4
- HB500WELDED
ADDITIONAL EDGE
- 5
- BEZEL
- 6
- REAR RAZOR

SP40 MACHINE WEIGHT 2,5 - 4,0 t (5512 - 8818 lb)

ADAPTERS

AR40

KG 11 (LB 24)

CS30

KG 18 (LB 39)

CS30 JANUS PRO

KG 19 (LB 41)

CR40


KG 14 (LB 30)

CM30

KG 12 (LB 26)

CW05

KG 9 (LB 19)

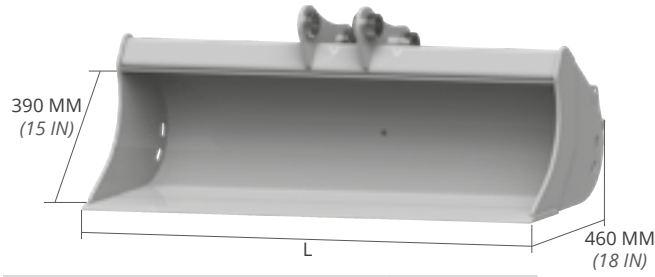

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1000 (39)	72 (159)	125 (33,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1200 (47)	85 (187)	154 (40,7)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	98 (216)	182 (48,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL


- 2
- PERFORATED
BLADE
- 3
- HB400ADDITIONAL
EDGE MOUNTED ON
THEBUCKET
- 4
- HB500WELDED
ADDITIONAL EDGE
- 5
- BEZEL
- 6
- REAR RAZOR

* weight of the tank excluding attachment

* weight of the tank excluding attachment

SP45 MACHINE WEIGHT 4,0 - 5,0 t (8818 - 11023 lb)

ADAPTERS	AR50	CS30	CS30 JANUS PRO	CR50	CM100	CW10
	KG 17 (LB 37)	KG 18 (LB 39)	KG 19 (LB 41)	KG 22 (LB 48)	KG 35 (LB 77)	KG 23 (LB 50)

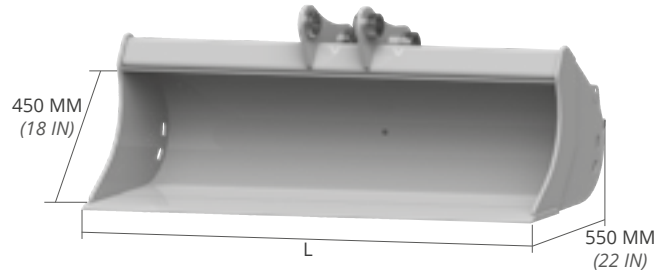


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	113 (249)	213 (56,3)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	130 (287)	254 (67,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1500 (59)	138 (304)	274 (72,4)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1600 (63)	146 (322)	295 (78)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

2	3	4	5	6
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL EDGE	BEZEL	REAR RAZOR

SP50 SP50 MACHINE WEIGHT 5,0 - 7,5 t (11012 - 16535 lb)

ADAPTERS	AR50	AR70	CS80	CS80 JANUS PRO	CR50	CR70	CM100	CW10
	KG 17 (LB 37)	KG 24 (LB 52)	KG 44 (LB 97)	KG 46 (LB 101)	KG 22 (LB 48)	KG 34 (LB 75)	KG 35 (LB 77)	KG 23 (LB 50)

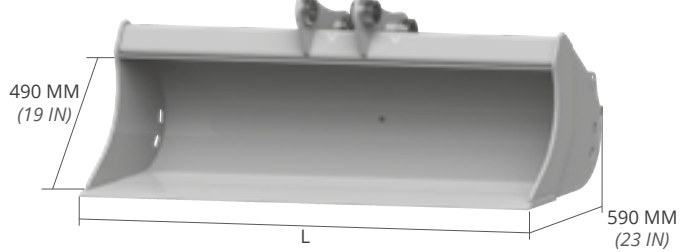


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	136 (300)	250 (66,0)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	156 (344)	298 (78,8)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1600 (63)	176 (388)	345 (91,1)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO
1800 (71)	196 (432)	392 (103,6)	AF - AR - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

2	3	4	5	6
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL EDGE	BEZEL	REAR RAZOR

SP55 MACHINE WEIGHT 7,5 - 10,0 t (16535 - 22046 lb)

ADAPTERS	CS80	CS80 JANUS PRO	CR70	CM100	CW10
	KG 44 (LB 97)	KG 46 (LB 101)	KG 34 (LB 75)	KG 35 (LB 77)	KG 23 (LB 50)

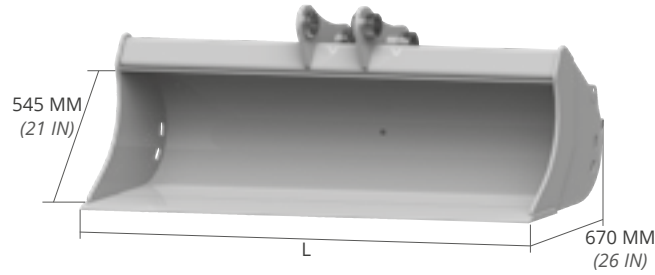


L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	183 (403)	326 (86,1)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1400 (55)	209 (461)	387 (102,2)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1600 (63)	236 (520)	447 (118,1)	AF - CS
			CR - CM
			CW - CS JANUS PRO
1800 (71)	263 (580)	507 (133,9)	AF - CS
			CR - CM
			CW - CS JANUS PRO

OPTIONAL

2	3	4	5	6
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL EDGE	BEZEL	REAR RAZOR

SP60 MIDI MACHINE WEIGHT 10,0 - 12,0 t (22046 - 26455 lb)

ADAPTERS	CS80	CS80 JANUS PRO	CR70	CM180	CW20
	KG 44 (LB 97)	KG 46 (LB 101)	KG 34 (LB 75)	KG 66 (LB 145)	KG 54 (LB 119)

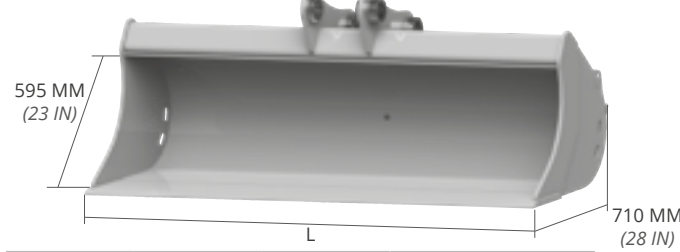

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1200 (47)	218 (481)	367 (97,0)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1400 (55)	248 (547)	436 (115,2)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1600 (63)	280 (617)	504 (133,1)	AF - CS
			CR - CM - CS JANUS PRO
			CW
1800 (71)	310 (683)	573 (151,4)	AF - CS
			CR - CM - CS JANUS PRO
			CW
2000 (79)	340 (750)	641 (169,3)	AF - CS
			CR - CM - CS JANUS PRO
			CW

OPTIONAL

2	3	4	5	6
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL EDGE	BEZEL	REAR RAZOR

* weight of the tank excluding attachment


* weight of the tank excluding attachment

SP65 GD

EXCAVATOR

MACHINE WEIGHT 12,0 - 18,0 t (26456 - 39683 lb)

ADAPTERS	CS100	CS100 JANUS PRO	CM180	CW20
	 KG 45 (LB 99)	 KG 93 (LB 205)	 KG 66 (LB 145)	 KG 57 (LB 126)

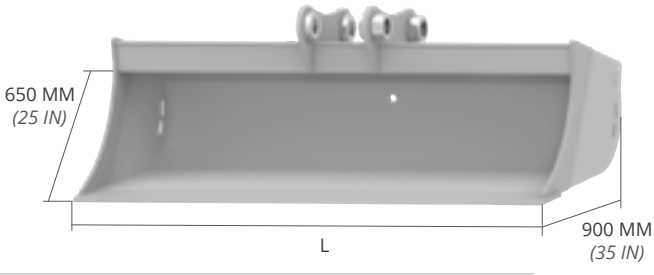

L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1400 (55)	318 (701)	631 (166,7)	AF - CM
			CS - CW
			CS JANUS PRO
1500 (59)	339 (747)	665 (175,7)	AF - CM
			CS - CW
			CS JANUS PRO
1600 (63)	359 (791)	699 (184,7)	AF - CM
			CS - CW
			CS JANUS PRO
1800 (71)	400 (882)	767 (202,6)	AF - CM
			CS - CW
			CS JANUS PRO
2000 (79)	440 (970)	835 (220,6)	AF - CM
			CS - CW
			CS JANUS PRO

OPTIONAL

2	3	4	5	6
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL EDGE	BEZEL	REAR RAZOR

SP70 GD

MACHINE WEIGHT 18,0 - 22,0 t (39683 - 48502 lb)

ADAPTERS	CS100	CS100 JANUS PRO	CM180	CW30
	 KG 45 (LB 99)	 KG 93 (LB 205)	 KG 66 (LB 145)	 KG 66 (LB 145)



L MM (IN)	WEIGHT KG* (LB*)	CAP. SAE L (GAL)	ADAPTERS
1500 (59)	417 (919)	780 (206,1)	AF - CM
			CS - CW
			CS JANUS PRO
1600 (63)	442 (974)	820 (216,6)	AF - CM
			CS - CW
			CS JANUS PRO
1800 (71)	492 (1085)	900 (237,8)	AF - CM
			CS - CW
			CS JANUS PRO
2000 (79)	540 (1190)	980 (258,9)	AF - CM
			CS - CW
			CS JANUS PRO
2200 (87)	586 (1292)	1060 (280,0)	AF - CM
			CS - CW
			CS JANUS PRO

OPTIONAL

2	3	4	5	6
PERFORATED BLADE	HB400 ADDITIONAL EDGE MOUNTED ON THE BUCKET	HB500 WELDED ADDITIONAL EDGE	BEZEL	REAR RAZOR



* weight of the tank excluding attachment